

**DEL MEDICAL**

# FMT

FLOOR MOUNTED  
RADIOGRAPHIC SYSTEM



# System Overview

## Budget Friendly Clinical Solution

The Del Medical FMT System offers an economical, compact design ideal for hospital radiology departments, medical imaging centers and orthopedic facilities looking to maximize space and avoid costly room modifications. Secure 10 ft floor mounted rail allows for effortless longitudinal travel and quick positioning.

The FMT System was developed to keep costs low, while also producing the highest quality diagnostic images. Built in the USA, it is prepared to deliver many years of continuous use and exceptional user-satisfaction.

### System Includes

- ▶ FMT Floor Mounted Tube Stand
- ▶ EV800 Four-Way Elevating Float Top Table
- ▶ VS300 Wall Stand
- ▶ High Frequency Generator
- ▶ DELWORKS DR System

### Key Highlights



Electromagnetic Safety Locks



Rotational Tube Column



Powerful High Frequency Generator



Premium Table and Wall Stand



Integrated Workflow



Fixed and Wireless DR Detector Options



Dose Management Configurations



# Simple and Precise Imaging

The FMT tube stand is easy to use and features an analog angulation display, conveniently positioned finger-tip control buttons, and powerful magnetic locks to ensure steady, accurate tube head positioning. In addition, it only requires a ceiling height of 87 inches, making it one of the lowest ceiling height requirements in the industry.

## RT100 Four-Way Float Top Table

The RT100 table features a 700 lbs. patient weight capacity and a stain resistant floating table top which glides freely on a precision roller bearing system. Float top movements are safely controlled by heavy-duty electric locks, activated by a conveniently placed foot treadle release. The 17" x 17" standard cassette tray can accommodate any cassette sized detector with ease. Its all steel structure and welded base provides maximum strength and reliability. In addition, the RT100's base can be used to store Anthem generator electronics making it a great space saver for tight room layouts.

## VS100 Wall Stand

The ultra compact VS100 upright is powered by an electric lock release handle and dual counterweight cables for added patient and user safety. Its expansive vertical travel of 58" (148 cm) enables a complete range of exams from skull to weight bearing knee and ankle exams.



## Accessories and Options



### ▶ Table Side Handgrips

These sturdy handgrips can be mounted along the entire length of both sides of the table top to enhance patient safety.




### ▶ Lateral Cassette Holder

This adjustable holder can be mounted along both sides of the table top allowing for access to a variety of cross-table lateral views.



### ▶ Compression Band

This compression device is used to safely secure patients to the table top.

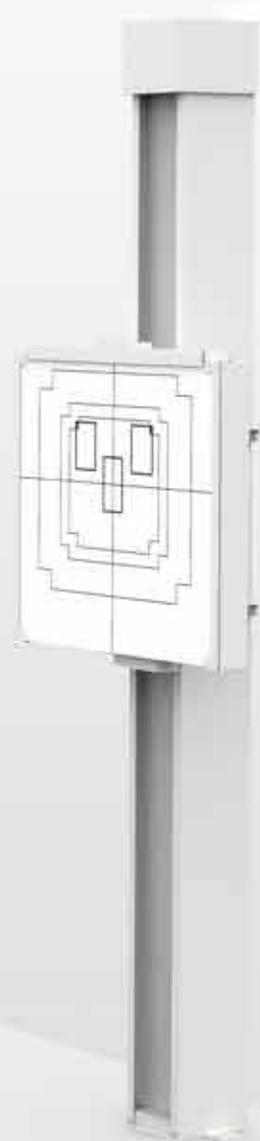

## Rotating Tray \* optional upgrade

The easy-to-use rotating tray enables manual rotation of the DR detector for use inside the RT100 table. Stable one-handed operation supports fast portrait-to-landscape positioning without ever removing the detector from the tray. Fully extended steel slides activate locking mechanisms to assure detector protection when loading and unloading. Designed to accommodate a wide array of ISO 14 x 17" cassette-sized detectors.



# DR Features

## High Quality Images, Reduced Patient Dose


### DELWORKS

DELWORKS is a powerful image acquisition and processing software featuring a user-friendly interface that provides sophisticated and speedy medical imaging. Designed with complex system automation, DELWORKS aims to simplify the examination process by making the difficult decisions for you.

Its advanced anatomical programming and image processing algorithms help optimize technologist productivity. DELWORKS strives to minimize human error and unwanted repeat exams to give technologists the highest quality image at a lower dose, with every exposure.

### Software Features

- ▶ Pre-exposure display of patient and procedure information, X-ray generator exposure factors, status and control functions integrated in a single display screen
- ▶ Exam-specific image processing algorithms automatically optimize images based on selected patient anatomy
- ▶ Enhanced image processing parameters. APR specific default values and manual adjustment, if desired
- ▶ Image rotation in 90° steps, horizontal mirroring, automatic and manual image cropping to collimated area
- ▶ Easy verification and correction of image laterality and patient orientation

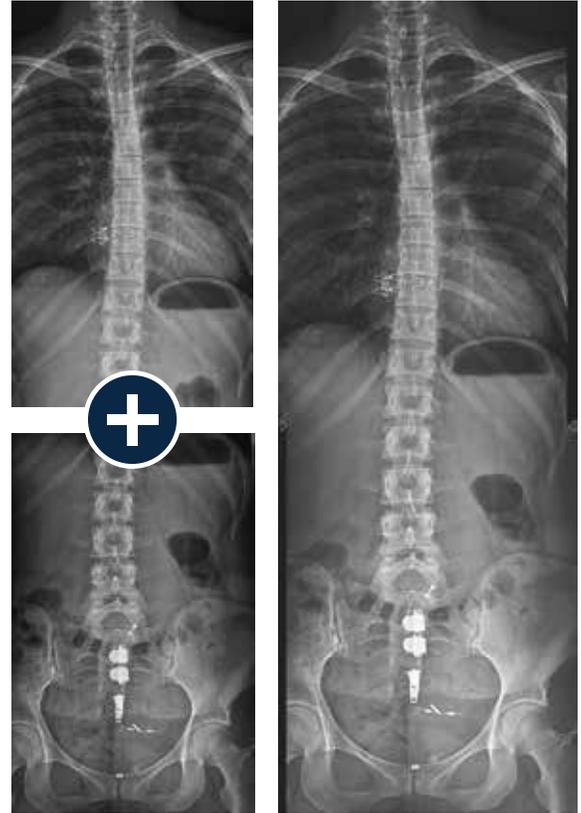

### Image Stitching

The optional image stitching application requires no unnecessary preprogramming or additional equipment, making full-length spine studies effortless and accurate.

- ▶ Intuitively add orientation markers and text comments directly to acquired images (pre-defined or free text)
- ▶ Detailed histograms of pixel density
- ▶ User selection of modified LUT (Look-Up Table) based on various exam types
- ▶ Manual adjustment of the LUT, window and level
- ▶ Effectively manage rejected images

# Premium Detectors Available in Single, Dual, or Multi-Detector Applications

## Wireless

### E14C

The E14C is an ultra-light, portable 14in x 17in (36cm x 43cm) wireless detector with outstanding image quality, offering the compact versatility needed to optimize workflow. The E14C has an internal accelerometer which automatically senses motion and takes the detector in and out of ready mode, extending its battery life.

### E24C

The E24C is a compact 24cm x 30cm version of the E14C detector that is ideal for small anatomy and pediatric imaging.



## EasyConnect

DELWORKS E-Series Wireless Detectors feature EasyConnect — an Auto Exposure Detection (AED) technology that keeps the detector in a standby mode, awaiting exposure from any X-ray source. Once an exposure is detected, it instantly captures the X-ray image and transmits it wirelessly to the system workstation.

## Fixed

### E17C

The E17C fixed, 17in x 17in (43cm x 43cm), large format flat-panel detector is designed to minimize technologist interaction with upright exams in a dual or multi-detector configuration. It is easy to integrate in all types of X-ray systems and delivers both quality images and fast exams, for increased productivity.



# Technical Specifications

\* All specifications subject to change without notice

## FMT Tube Stand

|   |   |
|---|---|
| Ceiling height:                                     | Minimum 87" (221 cm)                            |
| Column height:                                      | 85.5" (217 cm)                                  |
| Vertical travel:                                    | 64.5" (164 cm) total                            |
| Floor to focal spot (with standard platform mount): | Minimum 11" (28 cm), Maximum 75.5" (192 cm)     |
| Longitudinal travel:                                | 94" (239 cm)                                    |
| Rail longitudinal length:                           | 120" (305 cm)                                   |
| Transverse travel:                                  | 11" (28 cm)                                     |
| Tube, collimator, and cable support capacity:       | 88 lbs. (40 kg)                                 |
| Tube stand weight:                                  | 460 lbs (209 kg)                                |
| Platform assembly weight:                           | 125 lbs. (57 kg) net                            |
| Column rotation:                                    | 180° where installation permits                 |
| Tube rotation:                                      | ±180° detents for lateral decubitus projections |
| Base assembly to rear wall:                         | 8" (20.5 cm)                                    |
| Power requirements:                                 | 120 VAC or 230/240 VAC                          |

## EV800 Radiographic Table

|                        |   |
|------------------------|---|
| Patient load capacity: | 800 lbs. (363 kg)   |
| Table base length:     | 53" (135 cm)  |
| Table base width:      | 25" (64 cm)   |
| Table top movement:    | Longitudinal, ± 21.25" (54 cm) Transverse, ± 4.5" (11.4 cm)   |
| Variable height:       | 22.25" (56.5 cm) to 34.25" (87 cm)  |
| Bucky travel:          | ± 8.5" (22 cm)  |
| Table top length:      | 86.5" (220 cm)  |
| Table top width:       | 36" (91 cm)   |
| Weight:                | 563 lbs. (256 kg)   |
| Power requirements:    | 120 VAC or 230/240 VAC  |
| Options:               | 78" (198 cm) table top length / 32" (81 cm) table top width / Lateral cassette holder / Table-side patient handgrips / Rotating cassette tray |

## VS300 Wall Stand

|                         |  |
|-------------------------|--|
| Height:                 | 84" (213.4 cm)   |
| Depth:                  | 13.4" (34 cm)  |
| Receptor width:         | 24.6" (62.5 cm)  |
| Receptor height:        | 26.5" (67.3 cm)  |
| Weight (with receptor): | 200 lbs. (91 kg)   |
| Power requirements:     | 24 VDC, 1.25 max. momentary amps   |
| Options:                | Floor mount kit for freestanding version / Wall mount bracket extension kit / Rotating cassette tray |